




Premium quality, 18 gauge cut level D, much lighter & perfect dexterity, sandy nitrile. Reinforced.

KEY FEATURES

- The advanced 18 gauge lining technology contributes it as a thinnest & finest cut level D nitrile glove
- Over 30% lighter than a 13 gauge cut level D nitrile glove
- Premium quality technical yarns contributes to extra comfort, softness and a smooth feeling
- Perfect dexterity, fitting and flexibility makes it also ideal for precision works
- Reinforcement greatly extends glove life to save your cost and provides extra protection in the weakest area
- OEKO-TEX standard 100 certified for skin friendly
- Conforms to ANSI standard at cut level A4
- 10-finger touch screen function enables you to use any touch screen devices during work
- Contact heat protection up to 100 degree C according to EN407

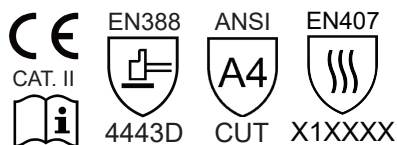


PRODUCT DETAILS

Liner	UHMWPE, steel mixed with other yarns
Gauge	18
Coating	Nitrile
Finishing	Sandy
Colour	Light Blue / Black
Size	7,8,9,10,11,12
Packing	12 pairs/pack, 144 pairs/carton
Tariff number	61161020

RECOMMENDED APPLICATIONS

General purpose or precision works with high cut hazard in dry or light oily conditions.

Such as precision works, assembly, handling parts with sharp or rough edges, maintenance, general handling, inspection, packaging, sorting...



CERTIFICATION

CE EN21420:2020+A1:2018

Category II

**EN388:2016 Mechanical protection:
levels obtained in laboratory tests**

Abrasion (min.0 to max. 4): **4**
Blade cut - coupe test (Index) (min.0 to Max. 5): **4**
Tear (min.0 to max. 4): **4**
Puncture (min.0 to max. 4): **3**
Cut resistance from sharp objects EN ISO
13997:1999 (min. A to Max. F, X - not tested): **D**
Impact protection (P if pass, F if failed): **-**

EN388:2016



4443D

**EN407:2020 Heat protection:
levels obtained in laboratory tests**

A - Limited flame spread X of 4
B - Contact heat: 1 of 4
C - Convective heat: X of 4
D - Radiant heat: X of 4
E - Small splashes of molten: X of 4
F - Large quantities of molten: X of 4

EN407:2020



X1XXXX

X = not tested or testing method is unsuitable for the design of the gloves.

EN21420:2020+A1:2018 Dexterity (min.0 to max.5):
level 5.

STORAGE AND SHELF LIFE

Please store the products in original packing in a dry and cool place without direct sunlight in general. The shelf life depends on the storage and other conditions. For the new product stored in a properly way, the shelf life of Xcellent 18-971 can normally be 5 years.

CLEANING

Washing or dry-cleaning requires prior consultation with a recognized specialist, because such treatment may alter the protective properties of the glove. The gloves must always be checked for integrity before reuse. The rating with the marked performance levels based on tests on unused gloves.

WARNING

Don't use in case of chemicals, moving machines or electrical risk.
Please ensure the products are strictly used within their protection levels.

